



ALPHABOND™

+91 90994 65837

Info@alphabond.in

www.alphabond.in





About Us

Alhabond is our flagship brand, proudly manufactured and marketed by Kishan Enterprise. Established in 2012, we began our journey in the sand supply industry. Over the years, we have expanded our expertise to become a leading manufacturer of high-quality building materials.

We specialize in manufacturing high-performance tile adhesives, mortar, and ready-mix plaster, designed to meet the evolving needs of the modern construction industry. Our products are engineered for superior bonding strength, durability, and ease of application, ensuring long-lasting and efficient construction solutions.


In addition to our advanced building materials, we also supply premium-quality micron sand, a crucial component in construction, to leading industry players. Our commitment to quality, innovation, and customer satisfaction has made us a trusted partner for builders, contractors, and developers who seek reliable and high-performing materials for their projects.

Our Vision

To be a leading force in the building materials industry by delivering superior-quality products, fostering sustainable construction solutions, and building long-term relationships based on trust and excellence.

Our Mission

- * To manufacture and supply high-performance building materials that meet the evolving demands of the construction industry.
- * To maintain the highest standards of quality, innovation, and sustainability in every product we create.
- * To ensure customer satisfaction by providing reliable, cost-effective, and efficient solutions.
- * To expand our reach and strengthen partnerships with leading construction companies and developers.

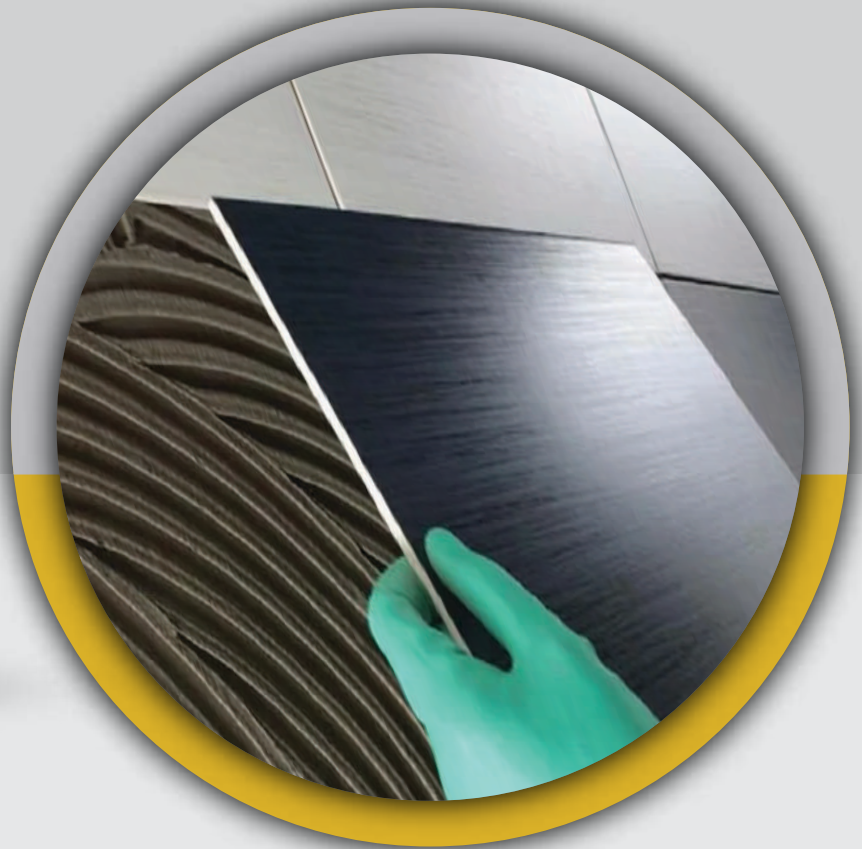

TILEGRIP X1

Premium Tile Adhesive for Superior Bonding

TileGrip X1 a high-performance, polymer-modified tile adhesive designed for superior bonding strength and durability. Engineered for both wall and floor applications, it provides excellent adhesion to various substrates, including concrete, cement plaster, and existing tiles.

HOW TO USE

Add 4.5 ltr. Water in 20 kg. ALPHABOND tile adhesive and make a mixture which can be used in in 0.5 to 1 hour. Apply with a trowel, stick the tiles in 10 to 15 minutes, and fill the joint after 24 hours.

PROPERTIES

Appearance	Grey/White Powder
Open Time	20 min at 20°C
Pot Life	Approx 120 min
Shear Strength	> 1.0 N/mm ²
Tensile Strength	> 0.5 N/mm ²
Coverage (20 kg bag)	4-5 m ² @ 3mm bed thickness

PACK SIZE

- 20 kg Bag

SUITABLE SUBSTRATE

- Plaster
- AAC Block Surface
- Cement base Surface
- RCC Surface
- Mosaic Tile Surface

AREA OF APPLICATION

- Ceramic tile on internal & external floor
- Vitrified tiles on internal floor
- Highly porous tiles



TILEGRIP X2

High-Strength Tile Adhesive for Heavy-Duty Applications

TileGrip X2 is a high-bond tile adhesive specially formulated for large-format and heavy tiles. Designed for both interior and exterior applications, it provides exceptional adhesion and flexibility, ensuring a long-lasting and durable finish.

HOW TO USE

Add 4.5 ltr. Water in 20 kg. ALPHABOND tile adhesive and make a mixture which can be used in in 0.5 to 1 hour. Apply with a trowel, stick the tiles in 10 to 15 minutes, and fill the joint after 24 hours.

PROPERTIES

Appearance	Grey/White Powder
Open Time	20 min at 20°C
Pot Life	Approx 120 min
Shear Strength	> 1.25 N/mm ²
Tensile Strength	> 1.0 N/mm ²
Coverage (20 kg bag)	4-5 m ² @ 3mm bed thickness

PACK SIZE

- 20 kg Bag

SUITABLE SUBSTRATE

- Cement mortar beds
- Cement based self leveling screed
- Cement based plaster
- Brick masonry
- Concrete surfaces
- Concrete block masonry
- Cement terrazzo
- AAC block masonry

AREA OF APPLICATION

- Vitrified tiles & glass mosaic tiles, natural stones
- Internal & external/vertical & horizontal surfaces



TILEGRIP X3

Premium-Grade Tile Adhesive for Heavy & High-Traffic Applications

TileGrip X3 by Alfabond is a top-tier, high-performance tile adhesive specially formulated for demanding applications. Designed for large-format tiles, heavy stones, and high-traffic areas, it offers exceptional bonding strength, flexibility, and durability.

HOW TO USE

Add 4.5 ltr. Water in 20 kg. ALPHABOND tile adhesive and make a mixture which can be used in 0.5 to 1 hour. Apply with a trowel, stick the tiles in 10 to 15 minutes, and fill the joint after 24 hours.

PROPERTIES

Appearance	Grey/White Powder
Open Time	20 min at 20°C
Pot Life	Approx 120 min
Shear Strength	> 1.5 N/mm ²
Tensile Strength	> 1.5 N/mm ²
Coverage (20 kg bag)	4-5 m ² @ 3mm bed thickness

PACK SIZE

- 20 kg Bag

SUITABLE SUBSTRATE

- Cement mortar beds
- Brick/Block/ Concrete Masonry
- Waterproofing products
- Cement based self leveling screed
- Fibre cement slabs
- Cement based plaster/ Concrete

AREA OF APPLICATION

- Large format Vitrified and glass mosaic tiles
- Granite, marble and all types of stones
- Internal & external/vertical & horizontal surfaces



TILEGRIP X4

Ultimate Heavy-Duty Tile Adhesive for Extreme Conditions

TileGrip X4 by Alphasbond is a high-performance, industrial-grade tile adhesive designed for the most demanding applications. Engineered for large-format tiles, natural stones, and extreme environments, it delivers superior adhesion, flexibility, and durability for long-lasting performance.

HOW TO USE

Add 4.5 ltr. Water in 20 kg. ALPHABOND tile adhesive and make a mixture which can be used in in 0.5 to 1 hour. Apply with a trowel, stick the tiles in 10 to 15 minutes, and fill the joint after 24 hours.

PROPERTIES

Appearance	Grey/White Powder
Open Time	20 min at 20°C
Pot Life	Approx 120 min
Shear Strength	> 1.5 N/mm ²
Tensile Strength	> 1.5 N/mm ²
Coverage (20 kg bag)	4-5 m ² @ 3mm bed thickness

PACK SIZE

- 20 kg Bag


SUITABLE SUBSTRATE

- Cement based plaster/ Concrete
- Cement based self leveling screed
- Brick/Block/ Concrete Masonry
- Fibre cement slabs
- Waterproofing products
- Thermal Insulation paneling systems

AREA OF APPLICATION

- Large format and glass mosaic tiles
- Marble, granite, stones and laminated stoneware
- Plaster board, fibre-cement sheets, concrete surfaces

BLOCK JOINTING MORTAR

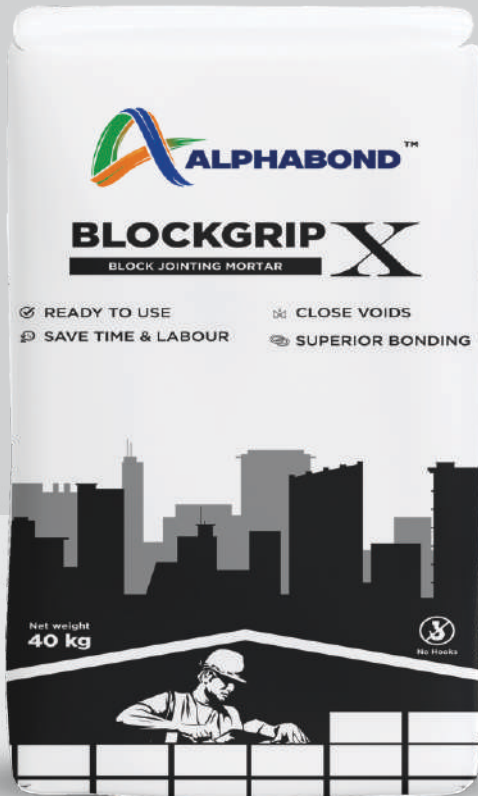

BLOCKGRIP X

High-Performance Ready Mix Mortar for Superior Masonry Work

BlockGrip X is a premium-grade ready-mix mortar designed for efficient and durable masonry applications. Engineered with high-quality cement, graded sand, and performance-enhancing additives, it ensures strong bonding, smooth application, and long-lasting durability for bricklaying and blockwork

HOW TO USE

Mix approx. 25 to 28% clean water in 40 kg powder & make a consistence workable paste & start applying to join blocks with the help of notch trowel to ensure good bonding. It will bond 40 blocks (900mm X 200mm x 150 mm) in 40 kg bag.

PROPERTIES

Appearance	Grey/White Powder
Pot Life	Approx 2 hrs. @ 27°C
Tensile Strength	> 0.6 N/mm ²
Compressive Strength	> 15 N/mm ² @ 14 Days

PACK SIZE

- 40 kg Bag


FEATURS & BENEFITS

- Perfect combination of cement, graded sand & additives makes it unique. This makes mortar more compact, thinner & Strong. Inter locking hold of blocks and bricks makes tough.

AREA OF APPLICATION

- AAC blocks joining works
- Stretcher block, Corner block, Pillar block joining works
- bricks

READY MIX CEMENT PLASTER

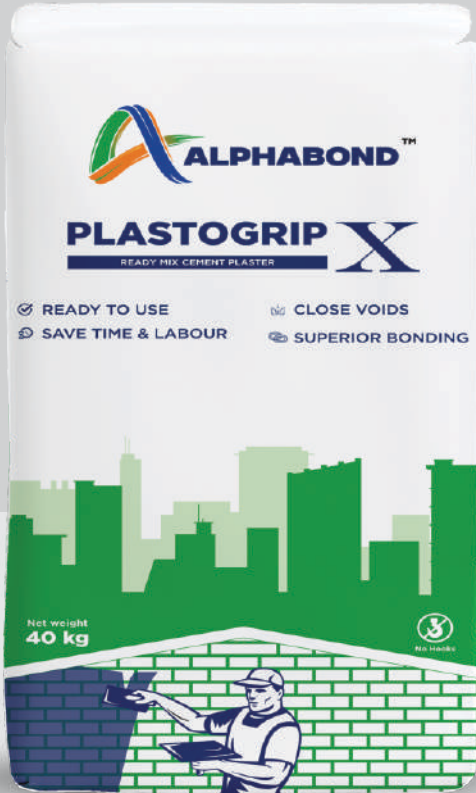

PLASTOGRIP X

High-Performance Ready-Mix Plaster for Superior Wall Finishing

PlastoGrip X is a high-quality, polymer-modified ready-mix plaster designed for smooth & durable wall finishes. It provides excellent adhesion, crack resistance, & workability, making it ideal for both interior and exterior applications. Formulated with graded sand, premium binders, & performance-enhancing additives, it ensures strong bonding, a smooth finish, and long-lasting durability.

HOW TO USE

Cure the wall with water before applying Ready Mix Plaster. First coat: Pour more water to make a thinner material and apply a coat. Second coat: Add required water in 40 kg bag, mix with a blender and apply the required coat on the wall.

PROPERTIES

Appearance	Grey Powder
Pot Life	Approx 90-120 min

PACK SIZE

- 40 kg Bag

FEATURES & BENEFITS

- Perfect combination of cement, graded sand & additives makes it unique. This makes mortar more compact, thinner & Strong. Inter locking hold of blocks and bricks makes tough.

AREA OF APPLICATION

- AAC blocks joining works
- Stretcher block, Corner block, Pillar block joining works
- bricks

HIGH PERFORMANCE PRECISION GROUT



ALPHAGROUT X1

High Performance Precision Grout

AlphagROUT X1 is a cement based non-shrink, non-expanding polymer enriched high performance, high strength, high quality binder for precision grouting applications. AlphagROUT X1 is formulated with advanced polymers, specialized additives, and carefully chosen fillers.

HOW TO USE

To grout a machinery base with AlphagROUT X1, prepare and clean the surface, set up sealed formwork, mix the grout with clean water to the desired consistency, pour it steadily from one side to avoid air pockets, finish the exposed areas neatly, and cure properly for at least 7 days to ensure optimal strength and durability.

PROPERTIES

Appearance	Grey Powder
Density	2200 to 2250 kg/m ³
Time Of Expansion	Start: 20min - Finish: 150min
Young's Modulus	25 KN/mm ²
Compressive strength	>10 N/mm ² @ 1 Days >35 N/mm ² @ 7 Days >45 N/mm ² @ 28 Days

FEATERS & BENEFITS

- AlphagROUT X1 is a blend of Portland cement, graded fillers, and additives that ensure controlled expansion, low water demand for high early strength, and consistent mixing

AREA OF APPLICATION

- Machine Foundation, Columns Joints
- Precast Construction, Gaps And Voids
- Grout anchors in Concrete
- Sealing around Penetrations
- Grout base Plate of Turbine, Compressors, Pumps & Heavy Machinery

PACK SIZE

25 kg Bag

HIGH PERFORMANCE PRECISION GROUT



ALPHAGROUT X2

High Performance Precision Grout

AlphagROUT X2 is a cement based non-shrink, non-expanding polymer enriched high performance, high strength, high quality binder for precision grouting applications. AlphagROUT X2 is formulated with advanced polymers, specialized additives, and carefully chosen fillers. Well-graded coarse aggregates up to 20mm in size can be added for larger volume applications.

HOW TO USE

To grout a machinery base with AlphagROUT x2, prepare and clean the surface, set up sealed formwork, mix the grout with clean water to the desired consistency, pour it steadily from one side to avoid air pockets, finish the exposed areas neatly, and cure properly for at least 7 days to ensure optimal strength and durability.

PROPERTIES

Appearance	Grey Powder
Density	2200 to 2250 kg/m ³
Time Of Expansion	Start: 20min - Finish: 120min
Young's Modulus	28 KN/mm ²
Compressive strength	>25 N/mm ² @ 1 Days >45 N/mm ² @ 7 Days >65 N/mm ² @ 28 Days

FEATERS & BENEFITS

- AlphagROUT X2 is a blend of Portland cement, graded fillers, and additives that ensure controlled expansion, low water demand for high early strength, and consistent mixing

AREA OF APPLICATION

- Machine Foundation, Columns Joints
- Precast Construction, Gaps And Voids
- Grout anchors in Concrete
- Sealing around Penetrations
- Grout base Plate of Turbine, Compressors, Pumps & Heavy Machinery

PACK SIZE

25 kg Bag

Crafted With Care Trusted By you





Marketed by: Kishan Enterprise

Register office: Shop No. A/12,
Ground Floor, Krishna Residency, N.H. 48,
Kamrej, Surat, Gujarat - 394186.

Manufacture by: Kishan Enterprise

Production House: Surevey No. 747/A,
N.H. 48, Behind Relief Hotel, Jhanghar,
Bharuch, Gujarat-392210



+91 90994 65837

Info@alphabond.in

www.alphabond.in